

**MEGAWARE** **FLEXSTEP** Pro  
**ADJUSTABLE BOAT TRAILER STEP**

## APPLICATION INSTRUCTIONS


Thank you for purchasing your Megaware FlexStep Pro. You are now part of a family of thousands of boat owners who have discovered the pleasure of convenient and worry-free boating. With the proper installation, you too will enjoy years of satisfied boating with the convenience of the FlexStep Pro.

### COMPONENTS:

- |                              |                               |
|------------------------------|-------------------------------|
| A - Base Mount               | F - 4 Bolts (4.25")           |
| B - Backing Plate            | G - 4 Bolt Protective Sleeves |
| C - Step                     | H - 4 Nylon Locking Nuts      |
| D - Step Receiver            | I - 4 Washers                 |
| E - 2 Locking Pins (3" & 2") |                               |

### TOOLS NEEDED:

17mm Wrench/Socket and/or Adjustable Wrench

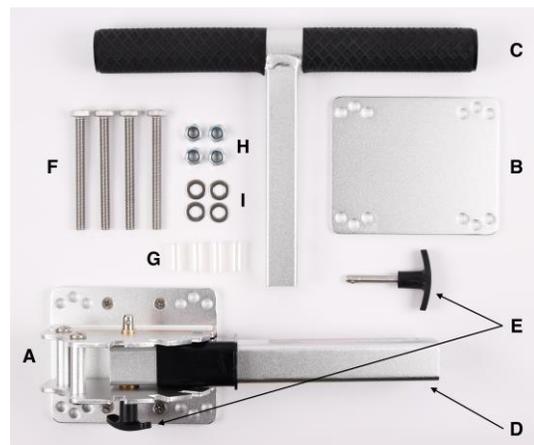

### **⚠ WARNING! MAX LOAD 300 LBS**

Read all instructions before using product. Improper use may result in property damage, serious injury, or death. Attach and use step (T-Bar) and receiver (Pivot Arm) only when trailer is stationary. Always completely remove and safely stow step (T-Bar) and receiver (Pivot Arm) before transporting or moving trailer and prior to loading boat on trailer. Serious damage to boat may result if boat is loaded while step (T-Bar) and/or receiver (Pivot Arm) is attached. Never stand on receiver (Pivot Arm) in any position; always use step. Do not use when slippery. Allow children to use product only with adult supervision. Inspect product before every use. Properly place and secure all parts before use. Insert all pins completely and lock securely before use. Do not use product if parts are damaged, missing, or loose. Contact manufacturer for replacement parts and repairs. Keep step clean from all mud, debris, plants, etc. MANUFACTURER NOT RESPONSIBLE FOR DAMAGE TO PROPERTY FROM IMPROPER USE. MANUFACTURER NOT RESPONSIBLE FOR ACCIDENT OR INJURY FROM IMPROPER USE.

**The FlexStep Pro is a very simple product to install; however, the following instructions must be strictly followed to properly and safely secure the FlexStep Pro to your boat trailer.**

The included hardware is designed to install the FlexStep Pro to any boat trailer with frames up to three inches deep. If your trailer frame is larger, you will need to purchase longer bolts separately at any hardware store.

Place the base mount on the trailer frame in the location of your choice. Take the four bolts and place them through the mounting plate and align with the trailer frame. To prevent trailer scratches, protective sleeves are provided to sheath the bolts where they could come in contact with the trailer frame. Place the backing plate on the back or rear side of the trailer frame (underside of frame if mounting to trailer tongue) and align the four bolts through the corresponding holes. Apply a washer over the end of the bolt and attach the nylon lock nut. Secure evenly with firm pressure. Be careful not to over tighten which could cause distortion of the base mount or backing plate.

The step receiver should arrive already attached to the base mount utilizing the 3 inch locking pin. To adjust the desired angle of the receiver, simply pull up on the spring loaded plastic handle located on the outside of the receiver and rotate to one of the four notches in the base mount. Release the pull handle and the spring loaded receiver will lock in place. Insert the step into the step receiver, align the holes where desired and insert the 2 inch locking pin.

For safety purposes, the FlexStep Pro must always be removed when moving the trailer or loading the boat on or off the trailer. This can be done by removing the 3 inch locking pin located on the base mount and removing the step and receiver as one unit. Please read the warning label attached to these instructions and product itself.